


WEATHERPROOF PERMANENT LEAD


CONNECTEUR FIXE ÉTANCHE – CONNECTOR FIJO
IMPERMEABLE – CONNETTORE FISSO IMPERMEABILE –
WASSERDICHTER FESTER ANSCHLUSSKABEL – VATTENTÄT
ANSLUTNINGSKABEL – 車輪間ケーブル (防滴キャップ付)

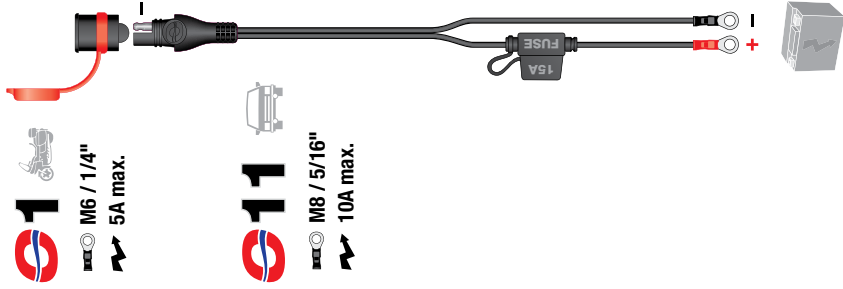

01
M6 / 1/4"
5A max.


11
M8 / 5/16"
10A max.

General Specifications:
0.5m / 20"
-40°C/°F
15A fuse



12V BIKE & CAR SOCKET CONNECTOR


FICHE ALLUME-CIGARE DIN & AUTO – ENCHUFE DIN &
MECHERO – CONNETTORE 12V DIN & AUTO –
12V ANSLUTNING BIL & CIGARETTÄNDARE-UTTAG –
DIN & AUTOVERBINDING – シガーDC プラグケーブル

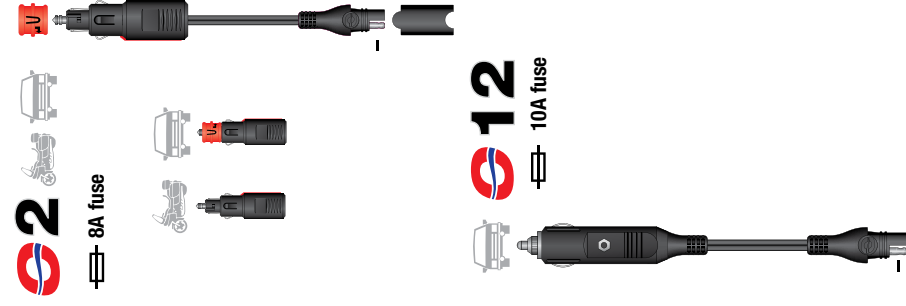

02
8A fuse


12
10A fuse

General Specifications:
0.5m / 20"
5A max.



CHARGE CABLE EXTENDER

RALLONGE DE CHARGE – EXTENSION DECARGA –
PROLUNGA CAVO DICARICA –
VERLÄNGERUNGSSCHNUR – FÖRLÄNGNINGSKABEL –
1.8M 延長ケーブル

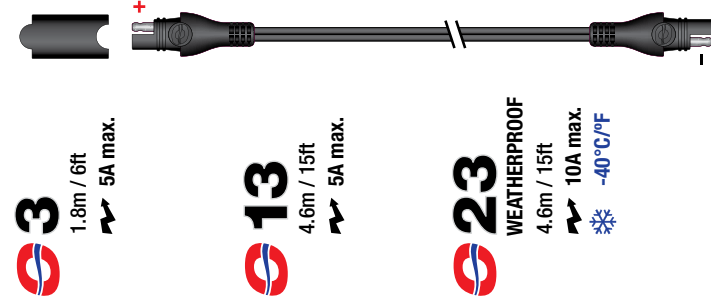


03
1.8m / 6ft
5A max.

13
4.6m / 15ft
5A max.

23
WEATHERPROOF
4.6m / 15ft
10A max.
-40°C/°F

General Specifications:
Bi-directional use: Opposite pin polarity
automatically adapts to the same as
inserted connector.




ALLIGATOR / BATTERY CLIPS

PINCES COCCODRILLES – PINZAS COCCODRILLOS –
PINZE COCCODRILLO – ANSCHLÜßKLEMMEN –
KROKODIL KLAMMA – ワニクリップケーブル




04

General Specifications:



Y-SPLITTER


CÂBLE Y AVEC FUSIBLES – ADAPTADOR Y CON FUSIBLE –
ADATTATORE Y CON FUSIBILE – FUSED Y-SPLITTER –
Y VERBINDUNGSKABEL MIT SICHERUNG – 二路分岐ケーブル
(SAE端子) フェーズ付き

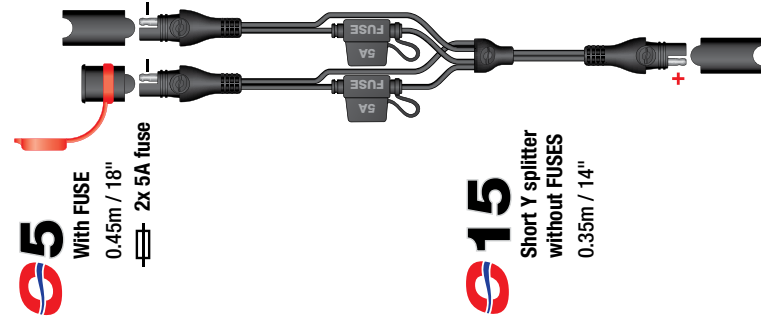

05
With FUSE
0.45m / 18"
2x 5A fuse


15
Short Y splitter
without FUSES
0.35m / 14"

General Specifications:
5A max.


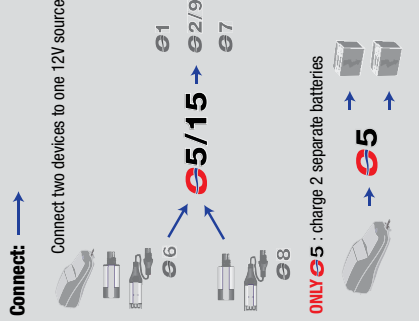


12V WEATHERPROOF ACCESSORY SOCKET

PRISE 12V ÉTANCHE – TOMA 12V IMPERMEABLE –
PRESA IMPERMEABILE 12V – 12V WASSERDICHTER
STECKDOSE – 12V VATTENTÄT HYLSA –
12V ソケットケーブル

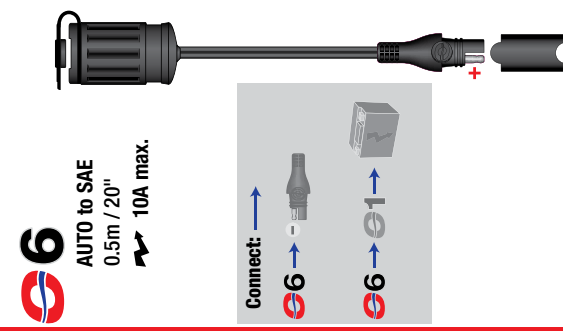

06
AUTO to SAE
0.5m / 20"
10A max.

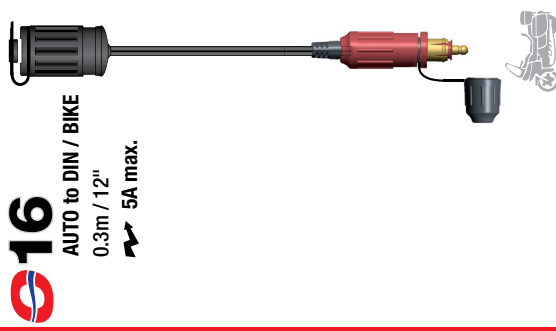



16
AUTO to DIN / BIKE
0.3m / 12"
5A max.

SAE ADAPTERS


ADAPTEUR SAE – ADAPTEUR SAE –
ADAPTEUR SAE – ADAPTEUR SAE –
車載用ケーブル (SAE)

TM ↔ SAE adapters

07
BATTERY LEAD
ADAPTER
0.15m / 6"



017
CHARGER LEAD
ADAPTER
0.15m / 6"




General specifications:

5A max.
-40°C/°F

TM (KET) connectors were phased out on all OptiMate models during 2012, replaced by the SAE compatible connection system. The 07 and 017 adapters guarantee compatibility between TM and connection systems.

Polarity adapter

027
SAE-**SAE** POLARITY
CONVERTER
0.15m / 6"




Connect:

SOLAR
PANEL
with
SAE

Motorcycle brand specific adapter

047
DUCATI
ADAPTER
057
MV AGUSTA
ADAPTER

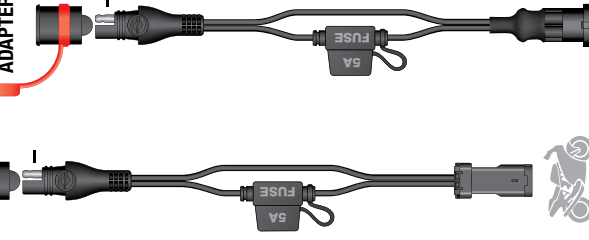

General specifications:

0.3m / 12"
5A fuse


Connect:

047/57

12V WEATHERPROOF PANEL-MOUNT DIN SOCKET

PRISE CHASSIS DIN 12V ETANCHE – TOMA DIN 12V
IMPERMEABLE – IMPERMEABLE DIN 12V –
12V WASSERDICHT STECKDOSE – 12V VATTERTÄT
DIN 12V – DINソケットケーシング


08
RUBBER PLUG




General specifications:

5A max.
-40°C/°F


018
SPRING FLIP TOP



09
1.2m / 48"
-40°C/°F

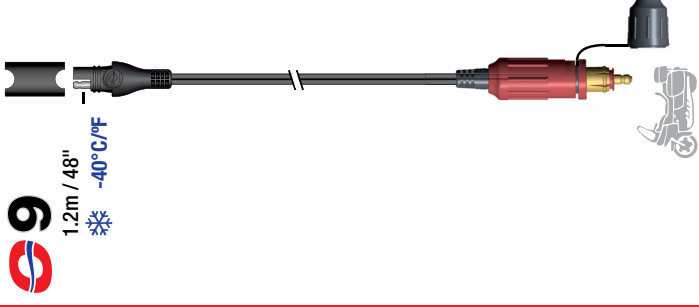

019
BASIC
0.3m / 12"

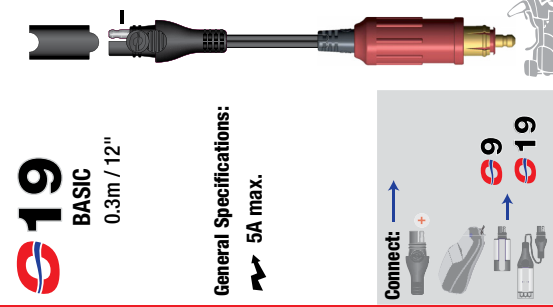

General Specifications:

5A max.

Connect:

09
019
05/15



Accessories are equipped with an innovative heavy duty connector that is rated at 15A and is SAE compatible. The removable end cap and in-line rubber sealing shrouds provides weather and dirt proof operation.

Connector polarity:
Positive pin open

Devices that charge or draw power from the battery.




Cables that convert to or from a different connection system.

06 **08** **017** **018**

Negative pin open

Cables that connect directly to the battery or a 12V outlet on the vehicle.



Discover more about
OptiMate battery saving
chargers and accessories
optimize1.com



TecMate International
Ambachtenlaan 6,
B-3300 Tienen, Belgium
TecMate North America
#1 - 1097 North Service Road
Oakville, ON L6H 1A6, Canada